

Scale-free brain functional networks¹

V. M. Eguíluz*, D.R. Chialvo[†], G. Cecchi[‡], M. Baliki[†] and A.V. Apkarian[†]

Instituto Mediterráneo de Estudios Avanzados IMEDEA (CSIC-UIB), E-07071 Palma de Mallorca, Spain

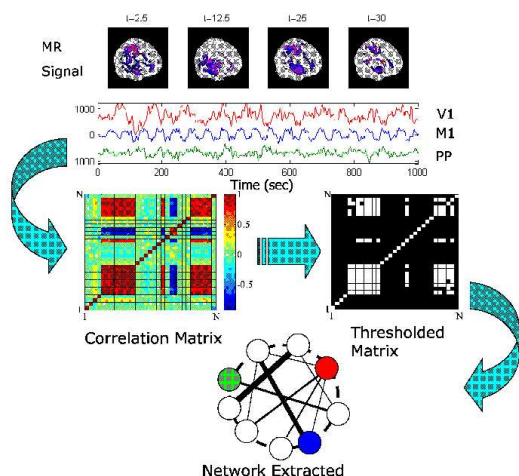


Figura 1. Functional magnetic resonance imaging is used to extract functional networks connecting correlated human brain sites. Analysis of the resulting networks in different tasks shows that (a) the distribution of functional connections, and the probability of finding a link versus distance are both scale-free, (b) the characteristic path length is small and comparable with those of equivalent random networks, and (c) the clustering coefficient is orders of magnitude larger than those of equivalent random networks. All these properties, typical of scale-free small-world networks, reflect important functional information about brain states.

Functional magnetic resonance imaging is used to extract functional networks connecting correlated human brain sites. Analysis of the resulting networks in different tasks shows that (a) the distribution of functional connections, and the probability of finding a link versus distance are both scale-free, (b) the characteristic path length is small and comparable with those of equivalent random networks, and (c) the clustering coefficient is orders of magnitude larger than those of equivalent random networks. All these properties, typical of scale-free small-world networks, reflect important functional information about brain states.

* <http://ww.imedea.uib.es/simvictor>;
e-mail: victor@imedea.uib.es

[†] Department of Physiology, Northwestern University, Chicago, Illinois, 60611, USA

[‡] IBM T.J. Watson Research Center, 1101 Kitchawan Rd., Yorktown Heights, New York 10598, USA

¹ V. M. Eguíluz et al., Phys. Rev. Lett. **92**, 028102 (2005).